

Plastic Omni Antenna

Low Cost Omni Antenna



AOA-2405TPS

AOA-5805TPS



Quality Ensured

All units are individually tested during production

Applications

- ISM Band
- Wireless Hotspot/Access Point/CPE
- Mesh network application

Features

- Superior performance
- Quality assurance
- Lightweight design
- All weather operation
- Pole / Wall mount



Installation Diagram



Model	AOA-2405TPS
Frequency	2400 - 2500MHz
Gain	6 dBi
V.S.W.R	< 1.5:1
Radiation	Omni
Impedance	50 Ω
Connector	RP-SMA male
Material	UV Protect Plastic

Model	AOA-5805TPS
Frequency	5100 – 5900MHz
Gain	5 dBi
V.S.W.R	< 1.5:1
Radiation	Omni
Impedance	50 Ω
Connector	RP-SMA male
Material	UV Protect Plastic



Plastic Omni Antenna

Antenna Pattern

AOA-2405TPS

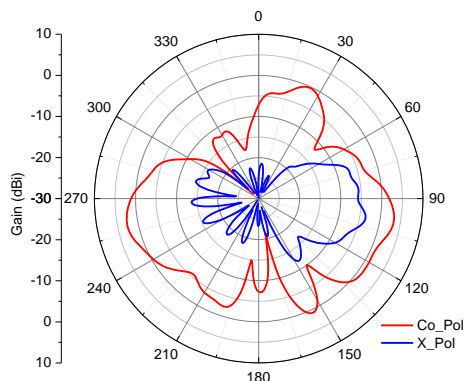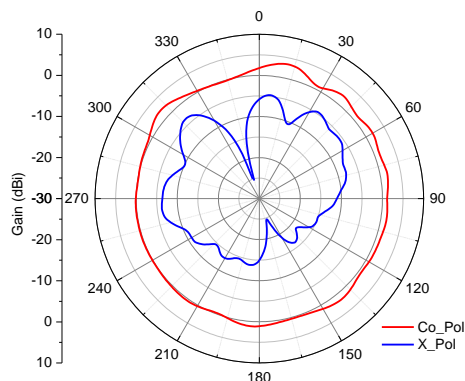

AOA-5805TPS

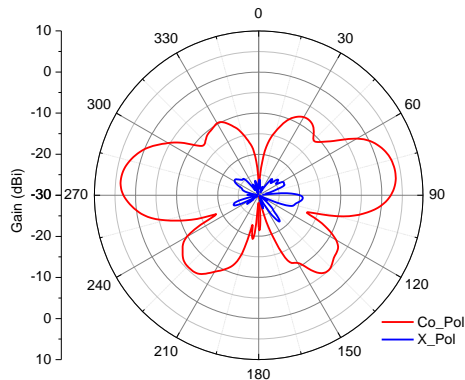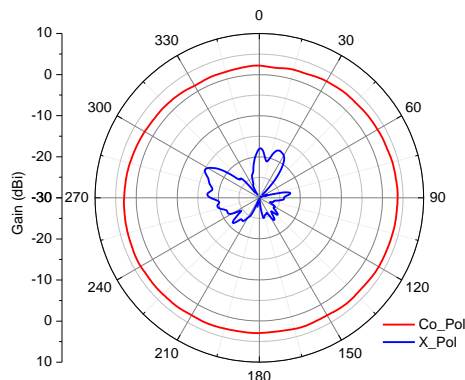

Order Information

AOA-2405TPS	2.4GHz 5dBi Outdoor Plastic Omni Antenna
AOA-5805TPS	5GHz 5dBi Outdoor Plastic Omni Antenna